


# Guided Ejector Bushings

SOLID ALUMINUM BRONZE AND SELF LUBRICATING

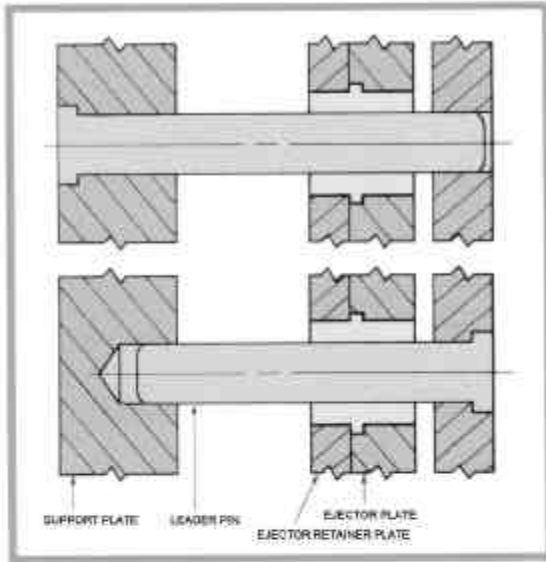

## SELF-LUBRICATING

								TOLERANCES	
								A	+ .000 - .001
								B	+ .000 - .030
								C	+ .00 - .03
								D	(MAX.)
								E	+ .0005 - .0000
								K	+ .0005 - .0000
M	+ .005 - .005								
NOM. I.D.	K	E	A	D	C	B	CATALOG NUMBER		
3/4	0.751	1.1255	1.1240	1.302	1.50	1.00	GEB-06SL		
7/8	0.876	1.2505	1.2490	1.427	1.50	1.00	GEB-07SL		
1"	1.001	1.3755	1.3740	1.552	1.75	1.12	GEB-08SL		
1 1/4	1.251	1.6255	1.6240	1.802	1.75	1.12	GEB-10SL		
1 1/2	1.501	2.0005	1.9990	2.177	1.75	1.12	GEB-12SL		
2"	2.001	2.5005	2.4990	2.687	2.25	1.62	GEB-20SL		

## ALUMINUM BRONZE

									TOLERANCES	
									A	+ .000 - .001
									B	+ .000 - .030
									C	+ .00 - .03
									D	(MAX.)
									E	+ .0005 - .0000
									K	+ .0005 - .0000
L	+ .005 - .005									
NOM. I.D.	K	E	A	D	C	B	L	CATALOG NUMBER		
3/4	0.751	1.1255	1.1240	1.302	1.50	1.00	0.56	GEB-06SB		
7/8	0.876	1.2505	1.2490	1.427	1.50	1.00	0.56	GEB-07SB		
1"	1.001	1.3755	1.3740	1.552	1.75	1.12	0.62	GEB-08SB		
1 1/4	1.251	1.6255	1.6240	1.802	1.75	1.12	0.62	GEB-10SB		
1 1/2	1.501	2.0005	1.9990	2.177	1.75	1.12	0.62	GEB-12SB		
2"	2.001	2.5005	2.4990	2.687	2.25	1.62	0.8	GEB-20SB		

◆ SELF LUBRICATING


◆ OIL IMPREGNATED GRAPHITE PLUGGED

◆ HIGH STRENGTH ALUMINUM BRONZE


◆ SOLID ALUMINUM BRONZE

◆ AUTO-LUBE DESIGN

◆ INDUSTRY STANDARD SIZES



# Guided Ejector Bushings

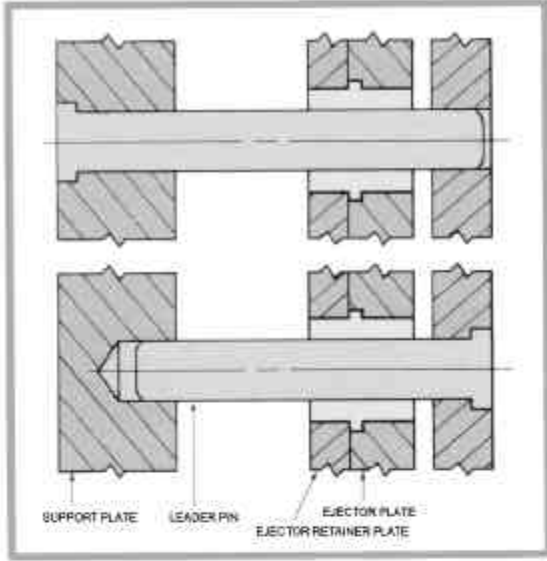

MSI guided ejector bushings are designed to hold the ejector assembly aligned and prevent potential cocking of ejector plates. It is recommended that a minimum of four bushings be used. Steel, bronze, and self lubing bushings will all reduce wear on ejection components. Two examples of installation are shown at left.



## STEEL

								TOLERANCES	
								<b>A</b>	+ .000 - .001
								<b>B</b>	+ .000 - .030
								<b>C</b>	+ .00 - .03
								<b>D</b>	(MAX.)
								<b>E</b>	+ .0005 - .0000
								<b>K</b>	+ .0005 - .0000
								<b>M</b>	+ .005 - .005
NOM. I.D.	K	E	A	D	C	B	CATALOG NUMBER		
3/4	0.751	1.1255	1.1240	1.302	1.50	1.00	<b>GEB-06</b>		
7/8	0.876	1.2505	1.2490	1.427	1.50	1.00	<b>GEB-07</b>		
1"	1.001	1.3755	1.3740	1.552	1.75	1.12	<b>GEB-08</b>		
1 1/4	1.251	1.6255	1.6240	1.802	1.75	1.12	<b>GEB-10</b>		
1 1/2	1.501	2.0005	1.9990	2.177	1.75	1.12	<b>GEB-12</b>		

## BRONZE PLATED

								TOLERANCES		
								<b>A</b>	+ .000 - .001	
								<b>B</b>	+ .000 - .030	
								<b>C</b>	+ .00 - .03	
								<b>D</b>	(MAX.)	
								<b>E</b>	+ .0005 - .0000	
								<b>K</b>	+ .0005 - .0000	
								<b>L</b>	+ .005 - .005	
NOM. I.D.	K	E	A	D	C	B	L	CATALOG NUMBER		
3/4	0.751	1.1255	1.1240	1.302	1.50	1.00	0.56	<b>ELB-750</b>		
7/8	0.876	1.2505	1.2490	1.427	1.50	1.00	0.56	<b>ELB-875</b>		
1"	1.001	1.3755	1.3740	1.552	1.75	1.12	0.62	<b>ELB-100</b>		
1 1/4	1.251	1.6255	1.6240	1.802	1.75	1.12	0.62	<b>ELB-125</b>		
1 1/2	1.501	2.0005	1.9990	2.177	1.75	1.12	0.62	<b>ELB-150</b>		

Dowel -- Type Stop Pins designed for special applications. Head thickness is .020 oversize to allow for grinding stock.



# Stop Pins

